

Kanlux

A modern office interior featuring a grid ceiling with square LED panels. The office has wooden desks, black office chairs, and glass-walled meeting rooms. Blue lines are drawn over the image, highlighting the lighting panels and the office layout.

**NEW SERIES
OF LED PANELS**

**Kanlux
BLINGO LED**

Kanlux



Kanlux BLINGO LED

#PANELS 2.0 #AUTOMATION

Full automation of the production process allows for repeatability and high quality of panels. This allows us to minimize the possibility of "human error", which in combination with quality components allows us to provide a 5-year warranty.



Kanlux

Kanlux BLINGO LED

**#RELIABLE
PARAMETERS**

efficiency up to: **142lm/W**

flux up to: **6250lm**

5 years warranty

Kanlux
LAB

5
WARRANTY
5 years



Kanlux

Kanlux BLINGO LED

#ADVANTAGES OF THE NEW VERSION

**Models with integrated
power supply**

The junction box included with the luminaire allows for through connection of panels and significantly speeds up the installation.

The panels can be combined with any ADTR surface mount frame.



Quick connector significantly speeds up the installation and makes it easier to connect the panels.

Kanlux



Kanlux BLINGO T 3W1

3W1

ONE PANEL=
THREE POWERS

BLINGO TN24-28W 6060NW

It is an LED panel in which the user decides about the power and thus the flux of the luminary. The power is changed when the switch in the power supply is moved.



Panel power supply equipped in quick terminal for easy and fast installation.



24W
3400lm



26W
3600lm



28W
4000lm


HIGHT $\frac{\text{lm}}{\text{W}}$
142





Kanlux

Kanlux BLINGO LED

BLINGO IPRN38W 6060NW

LED panel with IP44/20, can be used in places exposed to high humidity.

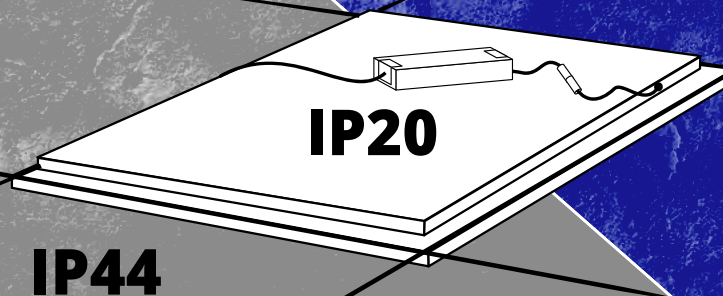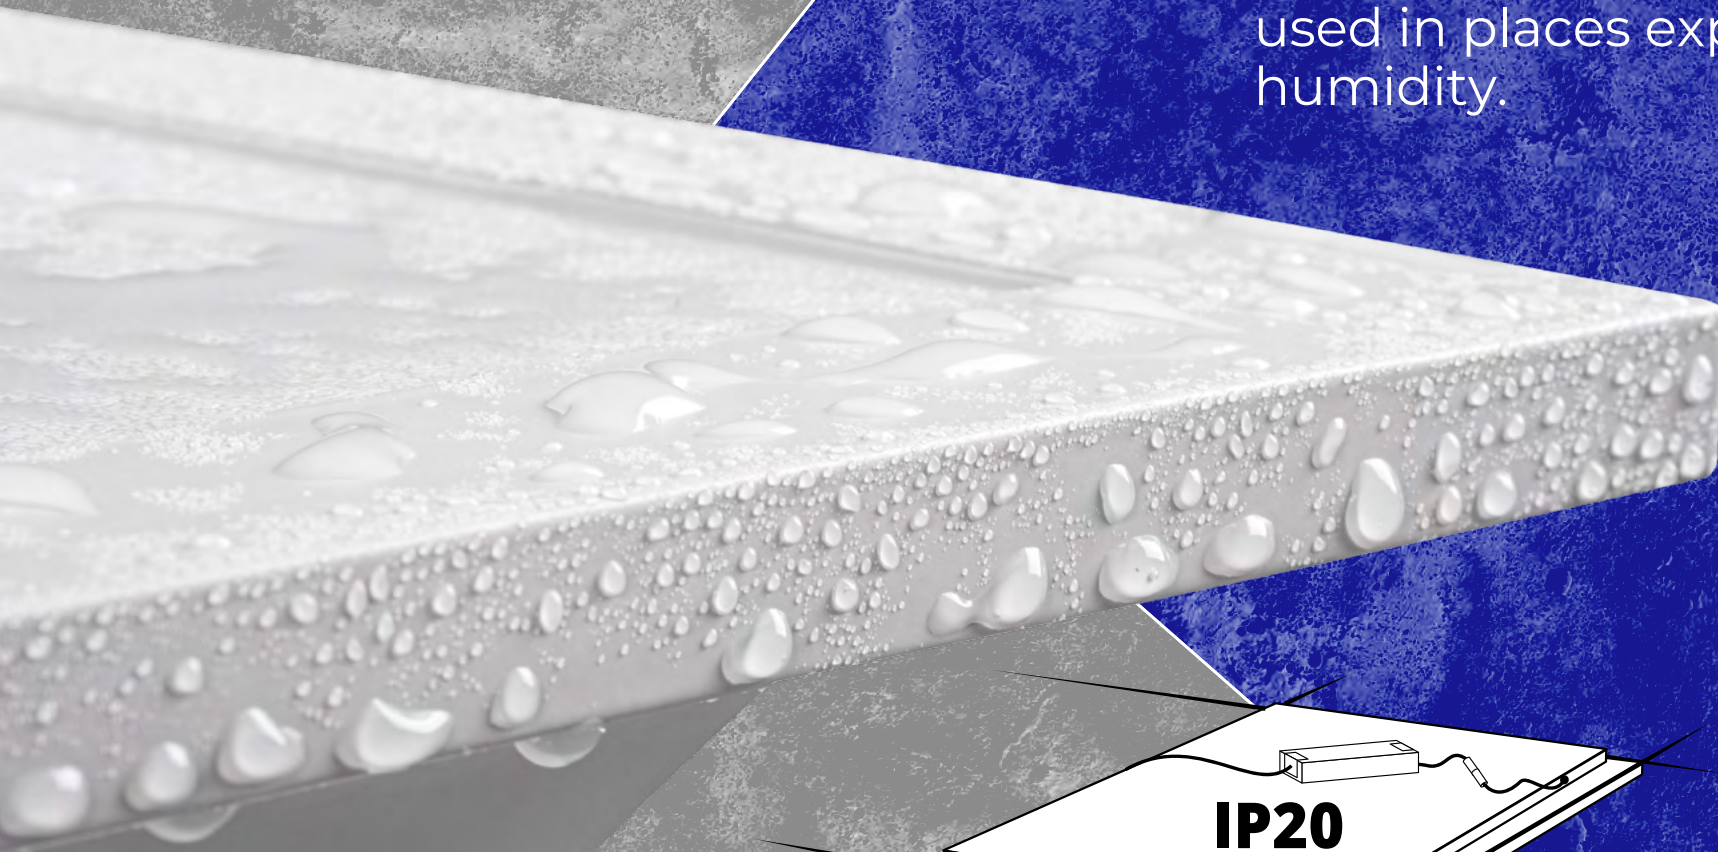

IP
44/20



Kanlux

Kanlux BLINGO LED #APPLICATIONS


It works in many
spaces.



Kanlux BLINGO LED

rated voltage:
220-240 V
colour temperature:
WW 3000K/ NW 4000K
durability:
50000h
base/frame
material:**steel**
lampshade
material:**Plastic**

INDEX	NAME	POWER [W]	LUMINUS FLUX [LM]	LUMINUS LM/W	BEAM ANGLE	UGR	IP	PROTECTION CLASS	INTEGRATED DRIVER-
29817	BLINGO R 36W 6060 NW	36	3800	106	115		20	I	TAK
29816	BLINGO R 36W 6060 WW	36	3600	100	115		20	I	TAK
29818	BLINGO RU 36W 6060 NW	36	3800	106	115	<19	20	I	TAK
33174	BLINGO IPRN38W 6060NW	38	3800	100	120		44/20	II	NIE
29819	BLINGO R 36W 12030 NW	36	3800	106	115		20	I	TAK
33176	BLINGO PN38W 6060 NW	38	4560	120	115		20	I	TAK
33175	BLINGO PN38W 12030 NW	38	4560	120	115		20	I	TAK
33178	BLINGO TN24-28W6060NW	24/ 26/28	3400/3600/4000	do 142	120		20	II	NIE
33177	BLINGO TN38W 6060 NW	38	5400	142	115		20	I	TAK
33179	BLINGO TUN48W 6060 NW	48	6250	130	115	<19	20	I	TAK

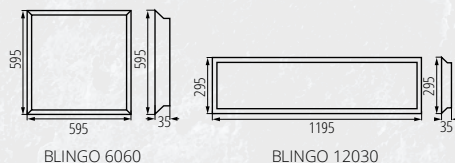

**** 5 YEARS GUARANTEE ON THE TERMS OF THE WARRANTY STATEMENT AVAILABLE ON THE WEBSITE**

Kanlux

Kanlux BLINGO LED



dobrze spakowane

kanlux.com

