

**B.E.G.****LUXOMAT®**

## LC-Click 200

Prod.No. 91102 EAN: 4007529911028

- Voltage: 110 – 240 V AC 50 / 60 Hz
- Dimensions: 90 x 67 x 82 mm
- Power consumption: approx. 0.4 W

### Order data

| Designation  | Colour | Art.No |
|--------------|--------|--------|
| LC-Click 200 | white  | 91102  |

### Accessories

| Designation                      | Colour          | Art.No |
|----------------------------------|-----------------|--------|
| RC-Arc extinction kit            | white           | 10880  |
| Mini-RC-Arc extinction kit       |                 | 10882  |
| Wire basket BSK (Ø 164 x 143 mm) | white           | 92467  |
| Pole holder                      | stainless steel | 93220  |
| Wall holder                      | white           | 93222  |
| Wall holder                      | anthracite      | 93221  |
| Frame LC                         | white           | 91080  |
| Frame LC                         | black           | 91081  |

## Technical data

|                                           |                                                  |
|-------------------------------------------|--------------------------------------------------|
| Voltage:                                  | 110 – 240 V AC<br>50 / 60 Hz                     |
| Dimensions:                               | 90 x 67 x 82<br>mm                               |
| Power consumption:                        | approx. 0.4 W                                    |
| Detection area:                           | horizontal 200°<br>(Wall mounting)               |
| Range:                                    | max. 12 m<br>across<br>max. 4 m<br>towards       |
| Monitored area (tangential movement):     | 250 m <sup>2</sup> / 2.5 m<br>mounting<br>height |
| Mounting height<br>min./max./recommended: | 2 m / 3 m / 2.5<br>m                             |
| Degree / class of<br>protection:          | IP44 / Class II                                  |
| Ambient temperature:                      | -25 °C to +50<br>°C                              |
| Housing:                                  | polycarbonate,<br>UV-resistant                   |
| Material color:                           | white mat,<br>similar to<br>RAL9010              |

### Channel 1 (lighting control)

|                      |                                              |
|----------------------|----------------------------------------------|
|                      | 1000 W, $\cos \varphi$<br>= 1                |
| Switching power:     | 500 VA, $\cos \varphi$ =<br>0.5<br>400 W LED |
| Type of contact (k): | 1x $\mu$ -contact,<br>NO contact             |
| Follow-up time:      | 4 sec – 10 min                               |
| Switch-on threshold: | 10 – 300 Lux                                 |




## Product information

Motion detector with detection area of 200°

Adjustable ball head

Simple mounting thanks to plug base

Detection area can be restricted with blinds

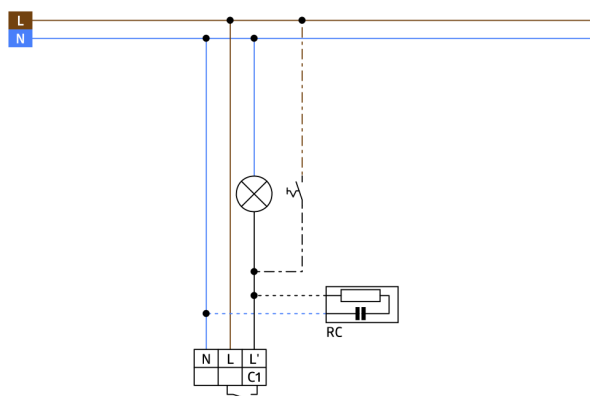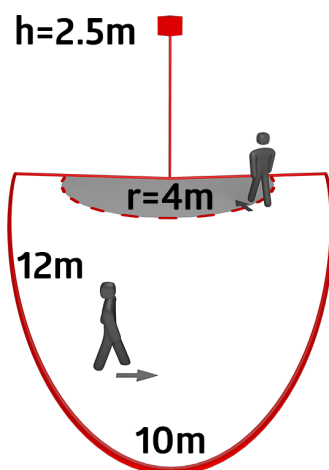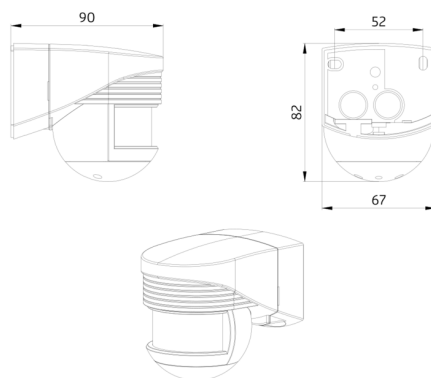

## Accessories



### RC-Arc extinction kit

Art.No: 10880

Voltage: 230 V AC  $\pm 10\%$   
Dimensions: 38 x 12 x 26 mm  
Degree / class of protection: IP20 /  
Class II



### Mini-RC-Arc extinction kit

Art.No: 10882


Voltage: 230 V AC  $\pm 10\%$   
Dimensions: 50 x 23 x 8 mm  
Degree / class of protection: IP20 /  
Class II



### Wire basket BSK (Ø 164 x 143 mm)

Art.No: 92467

Dimensions: Ø 164 x 143 mm  
Impact strength: IK09  
Housing: coated steel basket



### Pole holder

Art.No: 93220

Dimensions: 188 x 98 x 134 mm  
Housing: stainless steel  
Material color: stainless steel



### Wall holder

Art.No: 93222

Dimensions: 188 x 98 x 134 mm  
Material color: white



### Wall holder

Art.No: 93221

Dimensions: 188 x 98 x 134 mm  
Material color: anthracite



### Frame LC

Art.No: 91080

Dimensions: 78 x 78 x 13 mm  
Housing: polycarbonate, UV-resistant  
Material color: white



### Frame LC

Art.No: 91081

Dimensions: 78 x 78 x 13 mm  
Housing: polycarbonate, UV-resistant  
Material color: black