


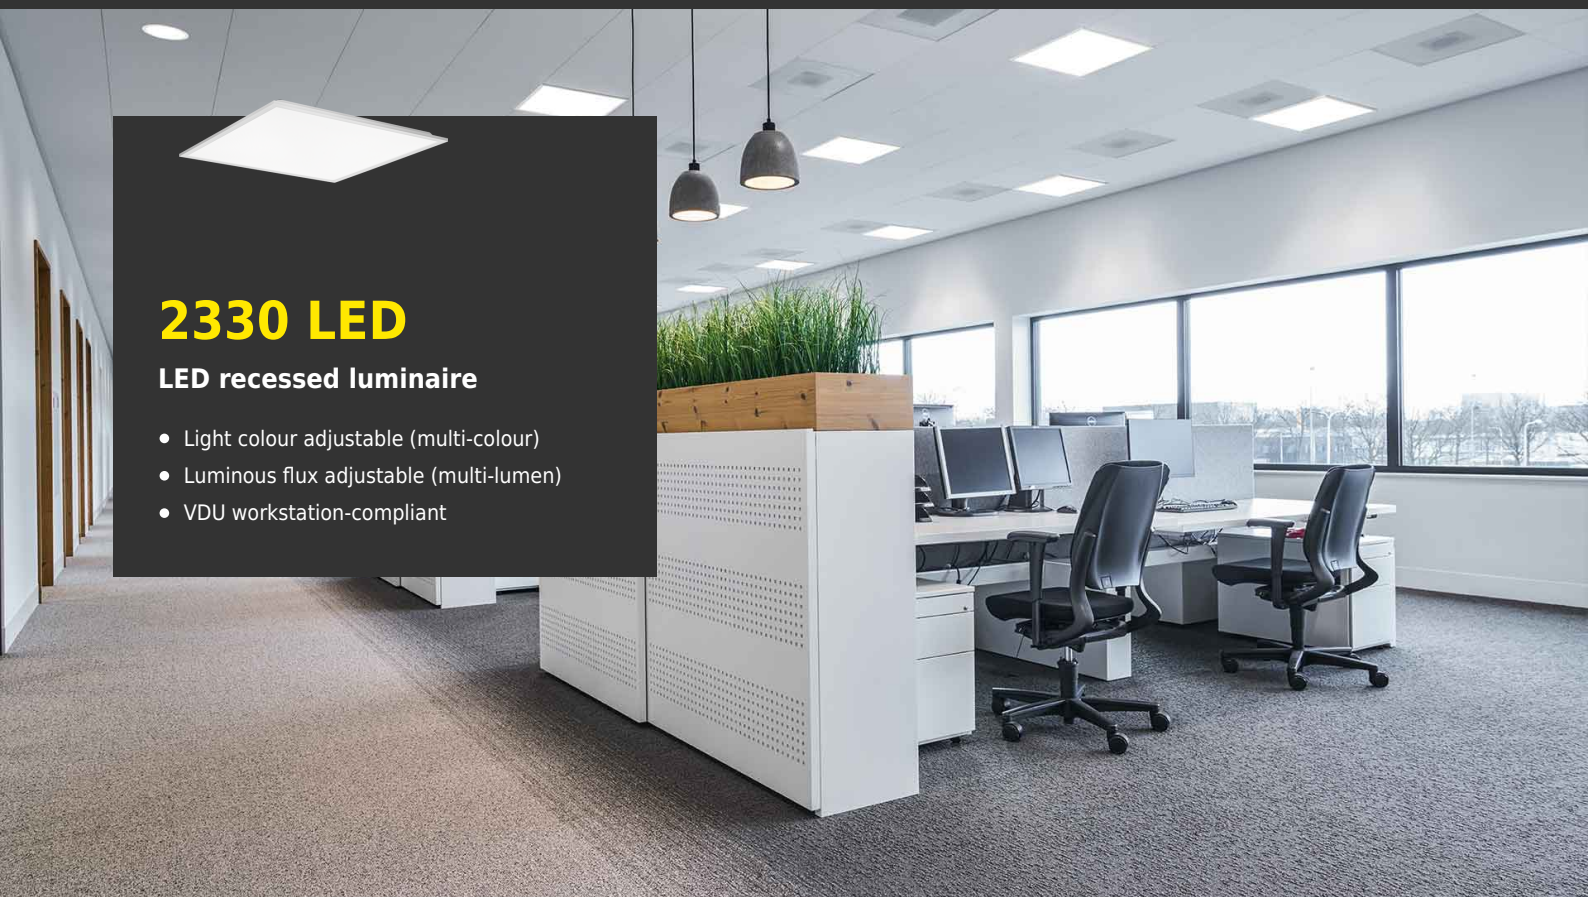

2330 LED

LED recessed luminaire

- Light colour adjustable (multi-colour)
- Luminous flux adjustable (multi-lumen)
- VDU workstation-compliant

The LED Panel 2330 G4 is an insert luminaire for system ceilings and can also be suspended and installed with practical accessories. It impresses with its suitability for computer workstations, multilumen and multicolour options, and types for use with light management systems. Typical areas of application are offices, corridors, foyers, conference rooms, sales areas and waiting areas.

LED Panel 2330 G4 at a glance

- Flexible use: With multi-lumen and multi-colour, 4 light outputs and 2 light colours are combined in one luminaire.
- Smart use: Wireless Connect (ETWD) and DALI (ETDD) types for light management systems.
- Pleasant lighting effect: Homogeneous illumination, suitable for computer workstations (UGR < 19)
- High efficiency: Up to 145 lm/W
- Solid service life: 50,000 hours (L80)
- Easy installation: Separate control gear for optimised workflows.
- Recessed luminaire for 600x600 mm ceiling grid.
- Practical accessories: For sawn ceiling cut-outs and suspended installation.
- Can be covered with insulation material (not ETWD types).
- Quick 1:1 replacement of conventional luminaires during refurbishment.

2330 LED at a glance

Dimensions	595 x 595 x 32 mm
Luminaire luminous flux	3.000, 3.400, 3.800, 4.200 lm
Colour Temperature	3.000 K / 4.000 K (Ra > 80)
Connected load	21-29 W
Protection rating, Safety class	IP20 / IK02, Schutzklasse I
Weight	2,2 kg

Lightmanagement

LiveLinkReady (ETDD), Wireless Connect (ETWD)

Service life

50,000 h (L80)

2330 LED

Product reference	TOC	Luminous flux [lm]	Connected load [W]	Colour temperature [K]	Dimensions [mm]
Multilumen					
2330 G4 M73 PW19 30-42/4ML-840 ET	6000682940	3000 - 4200 lm	21 - 29 W	4000 K	595 x 595 x 32 mm
Multicolour + Multilumen					
2330 G4 M73 PW19 30-42/4ML-8MC ET	6000683040	2800 - 4200 lm	21 - 29 W	3000 - 4000 K	595 x 595 x 32 mm
DALI					
2330 G4 M73 PW19 42-8MC ETDD	6000683151	3900 - 4200 lm	29 W	3000 - 4000 K	595 x 595 x 32 mm
2330 G4 M73 PW19 42-865 ETDD	6000702551	4200 lm	29 W	6500 K	595 x 595 x 32 mm
Multicolour Wireless Connect					
2330 G4 M73 PW19 42-8MC ETWD	6000683465	3900 - 4200 lm	29 W	3000 - 4000 K	595 x 595 x 32 mm
twenty3 basic *					
2330 G4 BS M73 36-840 ET	6000683240	3600 lm	33 W	4000 K	595 x 595 x 34 mm

Zubehör 2330 LED

Product reference	TOC	Description
ZH/M73 M84	6000877700	