
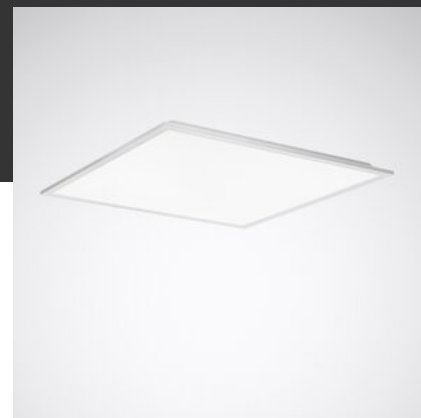



2330 G4 M73 PW19 42-865 ETDD

TOC: 6000702551

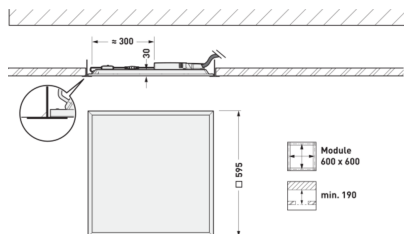

Product description

Luminaire type

Square recessed LED ceiling luminaire with prismatic PMMA cover. Version M84 (625 mm x 625 mm).

Applications

Offices, Corridors, Foyers, Conference rooms, Retail areas, waiting zones.

Mounting methods

For system ceilings with exposed grids.

Optical system

PMMA cover with microprisms. With symmetric limited wide light distribution. Glare evaluation according to UGR rating (EN 12464-1) < 19. Glare evaluation according to UGR rating (EN 12464-1) < 19. Suitable for VDU workstations according to EN 12464-1 via limited luminance $L \leq 3000 \text{ cd/m}^2$ for beam angle above 65° all-round. Harmonious light effect due to homogeneously illuminated light emission.

LED system

Luminaire luminous flux and light color fixed. Luminaire luminous flux 3600 lm, connected load 31 W, Power Faktor $\lambda > 0,95$, maximum luminous efficiency of luminaire 116 lm/W. Light colour daylight white, correlated colour temperature (CCT) 6500 K, general colour rendering index (CRI) $R_a > 80$. Colour locus tolerance (initial MacAdam) $\leq 5 \text{ SDCM}$. Mean rated service life $L70 (t_q 25^\circ\text{C}) = 50,000 \text{ h}$. Flicker: Pst LM ≤ 1.0 at full load. Stroboscopic effect: SVM ≤ 0.4 at full load.

Luminaire body

Luminaire body of aluminium. Surface coated white (similar to RAL 9016). Dimensions (L x W): 595 mm x 595 mm, luminaire height 32 mm. Safety class (EN 61140): I, protection rating (DIN EN 60529): IP20, Protection rating on room side: IP40, impact resistance level in accordance with IEC 62262: IK02, testing temperature of wire glow test in accordance with IEC 60695-2-11: 650 °C. Permissible ambient temperature (t_a): 25 °C. Weight: 2,0 kg.

Electrical version

With electronic control gear unit, digitally dimmable (DALI). Control gear unit according to DALI-2 standard (EN 62386). Luminaire is switchable and dimmable by means of touch functionality via DALI control terminals (Touch DIM). The control gear unit is replaceable in accordance with the ecodesign requirements (VO (EU) 2019/2020). The luminaire complies with the fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority.

Disassembly instructions (PDF) for the product available at: <https://www.trilux.com/EcoDesign>

Product features and key data

Applications	Offices Corridors Foyers Conference rooms Sales rooms Waiting zones
Luminaire type	Square recessed LED ceiling luminaire with prismatic PMMA cover.
Mounting method	Recessed
Luminaire optic	PMMA cover with microprisms.
Light distribution curve	Wide reduced glare UGR19 (W19)
FWHM	89,60 °
Light Engine	standard product
Colour temperature	6500 K
Rated luminous flux	4200 lm
Connected load	29,00 W

Product features and key data

Luminous efficacy	145 lm/W
Rated service life	L70 (25 °C) = 50.000 h
Colour rendering index	80
Colour tolerance	5 SDCM
Photobiological class	Group 0 - no risk
Luminaire colour	RAL9016 Traffic white
Luminaire body	Luminaire body of aluminium.
Electrical version	With electronic control gear unit, digitally dimmable (DALI).
Wire diameter	1,50 mm²
Connection method	Plug-in terminal
Touch-Dim-capable	Yes
Number of DALI addresses	1
Mains voltage	220 - 240 V
Mains frequency	0/50/60 Hz
Total harmonic distortion < %	14 %
Protection rating	IP20
Protection rating on room side	IP40
Protection class	I
Impact resistance (IK)	IK02
Hot wire resistance	650 °C
Ambient temperature	25 °C
Max. Luminaires B10	31
Max. Luminaires B16	50
Max. Luminaires C10	52
Max. Luminaires C16	85
Net length	595 mm
Net width	595 mm
Net height	32 mm
Recess length	595 mm
Recess width	595 mm
Recess depth	190 mm
Weight	2,0 kg

Available accessories

Material	Description
6000877700	Suspension accessories for luminaires of the series: 2330 M73/M84... G4 .

EPREL - European Product Registry for Energy Labelling

Energy Efficiency Class

D

Model identifier

MPL-60x60-26.3W G1 65

For more sustainability in day-to-day business

New
packing

CO₂ OPTIMISED

NO PLASTIC



ONLY ONE MATERIAL



100% RECYCLABLE

www.trilux-twenty3.com/eco