

**General info****Technical - Recessed lights**

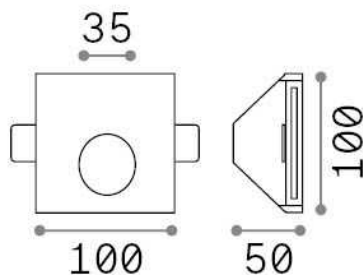
Indoor wall recessed path light with integrated LED sources and direct asymmetrical light emission



|                     |                        |
|---------------------|------------------------|
| <b>Ean</b>          | 8021696249834          |
| <b>Item</b>         | WALKY-3 FI             |
| <b>Installation</b> | Recessed (Wall)        |
| <b>Guarantee</b>    | 5 years                |
| <b>Gross weight</b> | 0.61 kg                |
| <b>Volume</b>       | 0.00091 m <sup>3</sup> |

**Technical info**

|                                |                                                                                |
|--------------------------------|--------------------------------------------------------------------------------|
| <b>Net weight</b>              | 0.58 kg                                                                        |
| <b>Insulation class</b>        | II                                                                             |
| <b>Protection index</b>        | IP20                                                                           |
| <b>Compliance</b>              | CE                                                                             |
| <b>Operating temperature</b>   | 0° ~ +40 °C                                                                    |
| <b>Dimmer</b>                  | Non-dimmable, On-Off                                                           |
| <b>Power output</b>            | 220-240 V AC 50/60 Hz                                                          |
| <b>Power supply</b>            | Separate, included<br>Replaceable (by qualified operators only),<br>electronic |
| <b>Recessed specifications</b> | 103 x 103 - h. ≥ 100 , 9-15                                                    |

**Source info**

|                               |                                           |
|-------------------------------|-------------------------------------------|
| <b>Integrated source</b>      | Integrated LED module                     |
| <b>Replaceable source</b>     | Replaceable (by qualified operators only) |
| <b>Power</b>                  | 1 W                                       |
| <b>Emission</b>               | Direct Asymmetrical                       |
| <b>Max consupcion</b>         | max 1,00 W                                |
| <b>Features LED</b>           | LED SMD                                   |
| <b>CCT</b>                    | 3000 K                                    |
| <b>Duration LED (t. 25°C)</b> | 50000 h                                   |
| <b>CRI</b>                    | > 90                                      |
| <b>Light beam</b>             | -                                         |
| <b>Light beam flux</b>        | 55 lm                                     |
| <b>Useful light flux</b>      | 40 lm                                     |
| <b>Standby power</b>          | < 0.50 W                                  |