

General info


DECORATIVO - Wall



Ean	8021696268071
Item	LINUS AP 4000K BK
Installation	Wall
Guarantee	5 years
Gross weight	1.59 kg
Volume	0.01575 m³

Technical info

Net weight	1.25 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	Dimmable, 1-10V
Power output	100-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

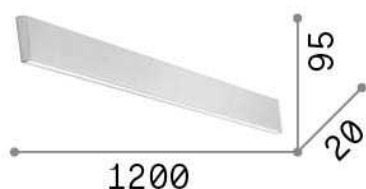

Source info

Integrated source	Integrated LED module
Replaceable source	No
Power	LED 32 W
Emission	Direct + Indirect
Max consupcion	max 32,00 W
Features LED	LED SMD
CCT	4000 K
Duration LED (t. 25°C)	50000 h
CRI	> 80
SDCM	3
Light beam	104+104°
Light beam flux	3600 lm
Useful light flux	3190 lm
Standby power	< 0.50 W