

General info

Technical - Recessed


Indoor ceiling recessed projector with integrated LED sources and direct light emission



Ean	8021696273167
Item	GAME ROUND 20W 3000K BK BK
Installation	Recessed (Ceiling)
Guarantee	5 years
Gross weight	0.98 kg
Volume	0.003328 m³

Technical info

Net weight	0.66 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	Separate, included Replaceable (by qualified operators only), electronic
Recessed specifications	Ø 110 - h. ≥ 150 , 3-35
Load resistance	IK06
Front protection index	IP40 [DO NOT COVER]
Accessories not included	Dimmable driver

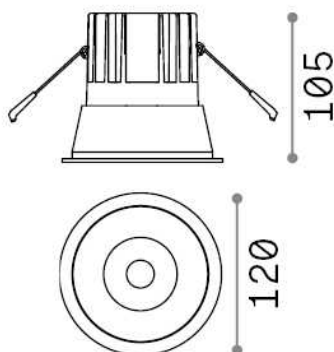

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	20W
Emission	Direct
Max consupcion	max 20,00 W
Features LED	LED COB BRIDGELUX
CCT	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
SDCM	3
Light beam	24°
UGR Maximum	< 19
Light beam flux	2350 lm
Useful light flux	1760 lm
Standby power	< 0.50