
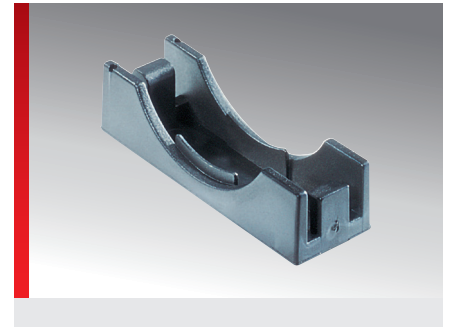
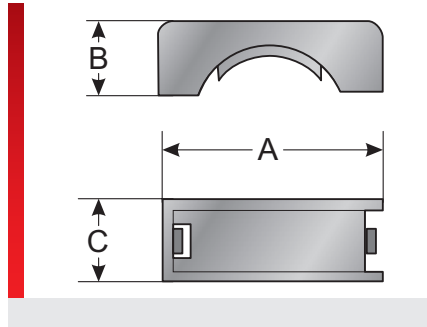


Type BL (clamping bracket for Types UH and UHG)

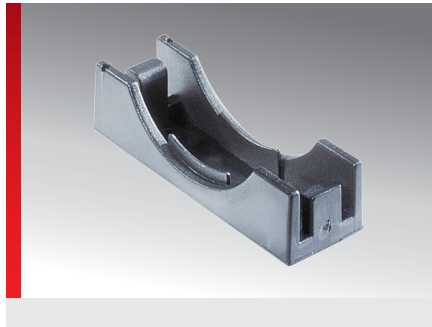

PRODUCT INFORMATION

The BL clamping bracket can be used for types UH and UHG and is made from specially modified polyamide. The material is halogen, phosphor and cadmium-free. The bracket can be used to achieve additional support of the conduit clamp for high loads.

Specification:

- EN 45545-2 3x HL3
- NFPA 130: ASTM E 162, ASTM E 662
- ECE 324 R 118 Annex 6+8

SPECIFICATIONS

	UL listed material Mod. polyamide PA 6
	-40 – 110 °F Short periods 140 °F
	acc. to UL94 V0 self-extinguishing
	C.I.T. R22 / R23 HL3 = 00:43 LOI R22 / R23 HL3 = 33,8 % Ds (max.) R22 / R23 HL3 = 63
	   

Article	Order No.	Color	Suitable for holder	G suitable for	A mm	B mm	C mm	MOQ pcs.
BL 09	83621406	Black	UH 09 / UHG 09		29.00	10.00	12.50	100
BL 11	83621408	Black	UH 11 / UHG 11		29.00	11.00	12.50	100
BL 16	83621410	Black	UH 16 / UHG 16		34.00	12.00	15.00	100
BL 21	83621412	Black	UH 21 / UHG 21		41.00	13.00	15.50	100
BL 29	83621414	Black	UH 29 / UHG 26		50.00	14.00	16.00	50
BL 36	83621416	Black	UH 36 / UHG 36		60.00	17.00	18.00	50
BL 48	83621418	Black	UH 48 / UHG 48		72.00	19.00	18.50	50
BL 09	83621146	Gray	UH 09 / UHG 09		29.00	10.00	12.50	100
BL 11	83621148	Gray	UH 11 / UHG 11		29.00	11.00	12.50	100
BL 16	83621150	Gray	UH 16 / UHG 16		34.00	12.00	15.00	100
BL 21	83621152	Gray	UH 21 / UHG 21		41.00	13.00	15.50	100
BL 29	83621154	Gray	UH 29 / UHG 26		50.00	14.00	16.00	50
BL 36	83621156	Gray	UH 36 / UHG 36		60.00	17.00	18.00	50
BL 48	83621158	Gray	UH 48 / UHG 48		72.00	19.00	18.50	50

MATERIAL PROPERTIES



UL listed material Mod. polyamide PA 6

THERMAL PROPERTIES



Temperature / temperature range
-40 – 110 °F Short periods 140 °F

Type BL (clamping bracket for Types UH and UHG)

FIRE BEHAVIOR



acc. to UL94 V0 self-extinguishing

**Fire properties as per EN 45545-2 :**

C.I.T. R22 / R23 HL3 = 00:43

LOI R22 / R23 HL3 = 33,8 %

Ds (max.) R22 / R23 HL3 = 63

TECHNICAL INFORMATION



Halogen-free

CONFORMITY



RoHS (EC Directive 2011/65/EU)

APPROVALS AND OPERATING PERMITS

**Railway EU approval**

EN 45545-2 R22/R23 3x HL3



cURus-approval

GENERAL INFORMATION



Made in Germany

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • prodID_65813~20220201~890283~suv_bl