



UNIVERSAL BEAM CLAMP, THICK FLANGE, M10 HOLE, THREADED

CATALOG NUMBER

310M10



CERTIFICATIONS



FEATURES

Universal beam clamp for thick beams

PRODUCT ATTRIBUTES

Article Number: 389890

Material: Cast Iron

Finish: Electrogalvanized

Hole Size: 10 mm

Hole Type: Threaded

Flange Thickness: 31.8 mm max

A: 28.6 mm

Torque: 7 N·m


Static Load 1: 2200 N

Static Load 2: 1100 N

ADDITIONAL PRODUCT DETAILS

Setscrew must be tightened and torqued onto the sloped side of the I-beam.

DIAGRAMS

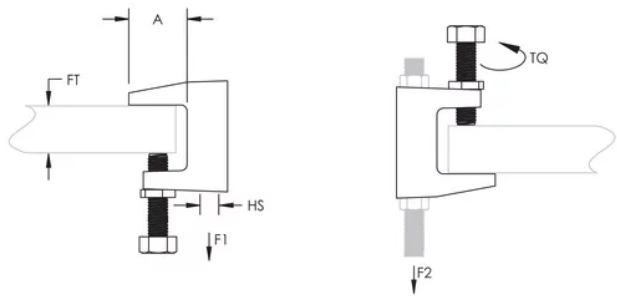

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500