
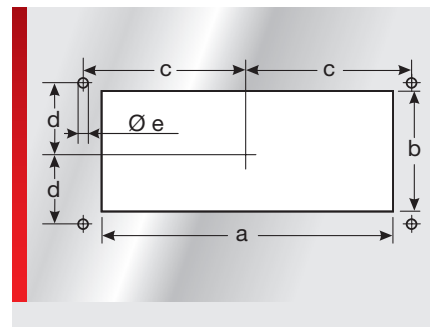


KDP/F 24 cable entry plate, plastic

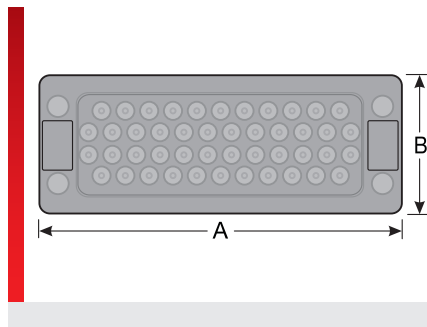

PRODUCT INFORMATION

Very flat plastic cable entry plate

Enormous time savings in assembly

High packing density

Large wire diameter ranges

Several cables may be fed through an opening together
no strain relief

Protection class: IP 65

Fire classification: HB

Thermal stability: -30 °C to +70 °C

Material: Frame: Polypropylene (PP) / Seal: TPE

RoHS compliant

UV resistant

Made in Germany

Suitable for standard cut-outs for 24-pin industrial connectors

Assembly with clips or M5 screws possible

SPECIFICATIONS

Frame: Polypropylene (PP)
Seal: TPE

-30 – 70 °F

IP 65

HB

LABS ISO 4882-2 RoHS Made in Germany

Article	Order No.	Color	No. Openings	MOQ pcs.
KDP/F 24-14	87302010	Black	14	1
KDP/F 24-14	87302011	Black	14	100
KDP/F 24-22	87302020	Black	22	1
KDP/F 24-22	87302021	Black	22	100
KDP/F 24-28	87302040	Black	28	1
KDP/F 24-28	87302041	Black	28	100
KDP/F 24-46	87302050	Black	46	1
KDP/F 24-46	87302051	Black	46	100
KDP/F 24-multi	87302030	Black	3	1
KDP/F 24-multi	87302031	Black	3	100

DIMENSION TABLE

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/F 24-14	87302010	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50
KDP/F 24-14	87302011	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50
KDP/F 24-22	87302020	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50
KDP/F 24-22	87302021	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50
KDP/F 24-28	87302040	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50
KDP/F 24-28	87302041	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50
KDP/F 24-46	87302050	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50
KDP/F 24-46	87302051	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50
KDP/F 24-multi	87302030	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50

KDP/F 24 cable entry plate, plastic

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/F 24-multi	87302031	10.00	148.00	60.00	112.00	36.00	65.00	16.00	5.50

MATERIAL PROPERTIES



Frame: Polypropylene (PP)
Seal: TPE

THERMAL PROPERTIES



Temperature / temperature range
-30 – 70 °F

PROTECTION CLASS



Protection class
IP 65

FIRE BEHAVIOR



HB

TECHNICAL INFORMATION



free of LABS



According to ISO 4892-2

CONFORMITY



RoHS (EC Directive 2011/65/EU)

GENERAL INFORMATION



Made in Germany

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_134296~20220201~890287~kdh_kdp_f_24