


Type VG (plastic thread)

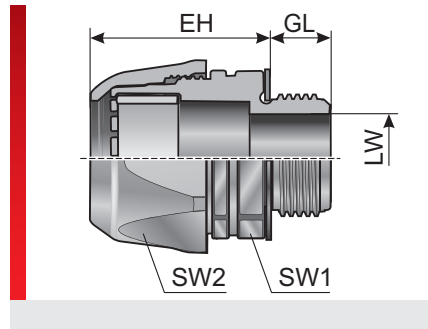

PRODUCT INFORMATION

The VG conduit fittings are made of specially modified polyamide 6 and thermoplastic elastomer. The materials are halogen, phosphor and cadmium-free. The VG conduit fittings feature the following advantages:

- Quick assembly, insert conduit, screw upper part tight, done
- No parts can get lost, delivered completely assembled
- Resistant to vibration due to lockable cap

nut

- Clamping along entire circumference, ensuring maximum tensile strength
- High level of tightness at IP 68/69K to 6 bar and without any add-on components to EN 60529

Specification:

- EN 45545-2 3x HL3
- NFPA 130: ASTM E 162, ASTM E 662
- ECE 324 R 118 Annex 6+8

SPECIFICATIONS

	Fitting: Mod. polyamide PA 6
	Connecting thread Mod. polyamide PA 6
	-40 – 110 °F Short periods 140 °F
	IP 68 up to 6 bar (IP 69K)
	acc. to UL94 V0 self-extinguishing
	C.I.T. R22 / R23 HL3 = 12:43 AM
	LOI R22 / R23 HL3 = 33,8 %
	Ds (max.) R22 / R23 HL3 = 63



Article	Order No.	Color	Connecting thread	Suitable for Murrflex	EH mm	GL mm	LW mm	SW 1 / 2 mm	MOQ pcs.
VG M12-K ⁽¹⁾	83511052	Black	M12x1,5	M12/P09	21.00	12.00	7.20	20.00 / 20.00	50
VG M16-K ⁽¹⁾	83511054	Black	M16x1,5	M16/P11	27.00	12.00	10.50	25.00 / 25.00	50
VG M20-K ⁽¹⁾	83511056	Black	M20x1,5	M20/P16	35.00	13.00	14.60	33.00 / 33.00	50
VG M25-K ⁽¹⁾	83511058	Black	M25x1,5	M25/P21	37.00	13.00	19.00	41.00 / 41.00	50
VG M32-K ⁽¹⁾	83511060	Black	M32x1,5	M32/P29	46.00	14.00	26.00	50.00 / 50.00	25
VG M40-K ⁽²⁾	83511062	Black	M40x1,5	M40/P36	53.00	17.00	33.50	60.00 / 60.00	25
VG M50-K ⁽¹⁾	83511064	Black	M50x1,5	M50/P48	60.00	17.00	41.20	75.00 / 75.00	10
VG M12-K ⁽¹⁾	83511012	Gray	M12x1,5	M12/P09	21.00	12.00	7.20	20.00 / 20.00	50
VG M16-K ⁽¹⁾	83511014	Gray	M16x1,5	M16/P11	27.00	12.00	10.50	25.00 / 25.00	50
VG M20-K ⁽¹⁾	83511016	Gray	M20x1,5	M20/P16	35.00	13.00	14.60	33.00 / 33.00	50
VG M25-K ⁽¹⁾	83511018	Gray	M25x1,5	M25/P21	37.00	13.00	19.00	41.00 / 41.00	50
VG M32-K ⁽¹⁾	83511020	Gray	M32x1,5	M32/P29	46.00	14.00	26.00	50.00 / 50.00	25
VG M40-K ⁽²⁾	83511022	Gray	M40x1,5	M40/P36	53.00	17.00	33.50	60.00 / 60.00	25
VG M50-K ⁽¹⁾	83511024	Gray	M50x1,5	M50/P48	60.00	17.00	41.20	75.00 / 75.00	10
VG P9-K ⁽¹⁾	83511452	Black	Pg 09	M12/P09	21.00	12.00	7.20	20.00 / 20.00	50
VG P11-K ⁽¹⁾	83511454	Black	Pg 11	M16/P11	27.00	12.00	10.50	25.00 / 25.00	50
VG P16-K ⁽¹⁾	83511456	Black	Pg 16	M20/P16	35.00	13.00	14.60	33.00 / 33.00	50
VG P21-K ⁽¹⁾	83511458	Black	Pg 21	M25/P21	37.00	13.00	22.00	41.00 / 41.00	50
VG P29-K ⁽¹⁾	83511460	Black	Pg 29	M32/P29	46.00	14.00	26.00	50.00 / 50.00	25
VG P36-K ⁽²⁾	83511462	Black	Pg 36	M40/P36	53.00	17.00	33.50	60.00 / 60.00	25
VG P48-K ⁽¹⁾	83511464	Black	Pg 48	M50/P48	60.00	17.00	49.00	75.00 / 75.00	10

Type VG (plastic thread)

Article	Order No.	Color	Connecting thread	Suitable for Murrflex	EH mm	GL mm	LW mm	SW 1 / 2 mm	MOQ pcs.
VG P9-K ¹⁾	83511412	Gray	Pg 09	M12/P09	21.00	12.00	7.20	20.00 / 20.00	50
VG P11-K ¹⁾	83511414	Gray	Pg 11	M16/P11	27.00	12.00	10.50	25.00 / 25.00	50
VG P16-K ¹⁾	83511416	Gray	Pg 16	M20/P16	35.00	13.00	14.60	33.00 / 33.00	50
VG P21-K ¹⁾	83511418	Gray	Pg 21	M25/P21	37.00	13.00	22.00	41.00 / 41.00	50
VG P29-K ¹⁾	83511420	Gray	Pg 29	M32/P29	46.00	14.00	26.00	50.00 / 50.00	25
VG P36-K ²⁾	83511422	Gray	Pg 36	M40/P36	53.00	17.00	33.50	60.00 / 60.00	25
VG P48-K ¹⁾	83511424	Gray	Pg 48	M50/P48	60.00	17.00	49.00	75.00 / 75.00	10
No stock goods, delivery time and minimum order quantities upon request									
VG N 3/8"-K ¹⁾	83511850	Black	3/8"	M16/P11	27.00	12.00	10.50	25.00 / 25.00	50
VG N 1/2"-K ¹⁾	83511852	Black	1/2"	M20/P16	35.00	13.00	14.60	33.00 / 33.00	50
VG N 3/4"-K ¹⁾	83511854	Black	3/4"	M25/P21	37.00	13.00	19.00	41.00 / 41.00	50
VG N 1"-K ¹⁾	83511856	Black	1"	M32/P29	46.00	14.00	26.00	50.00 / 50.00	25
VG N 1 1/4"-K ²⁾	83511858	Black	1 1/4"	M40/P36	53.00	17.00	33.50	60.00 / 60.00	25
VG N 2"-K ¹⁾	83511860	Black	2"	M50/P48	60.00	17.00	41.20	75.00 / 75.00	10
No stock goods, delivery time and minimum order quantities upon request									
VG N 3/8"-K ³⁾	83511810	Gray	3/8"	M16/P11	27.00	12.00	10.50	25.00 / 25.00	50
No stock goods, delivery time and minimum order quantities upon request									
VG N 1/2"-K ¹⁾	83511812	Gray	1/2"	M20/P16	35.00	13.00	14.60	33.00 / 33.00	50
VG N 3/4"-K ¹⁾	83511814	Gray	3/4"	M25/P21	37.00	13.00	19.00	41.00 / 41.00	50
VG N 1"-K ¹⁾	83511816	Gray	1"	M32/P29	46.00	14.00	26.00	50.00 / 50.00	25
VG N 1 1/4"-K ²⁾	83511818	Gray	1 1/4"	M40/P36	53.00	17.00	33.50	60.00 / 60.00	25
No stock goods, delivery time and minimum order quantities upon request									
VG N 2"-K ⁴⁾	83511820	Gray	2"	M50/P48	60.00	17.00	41.20	75.00 / 75.00	10
No stock goods, delivery time and minimum order quantities upon request									
¹⁾ With cURus- approval									
²⁾ With CSA- and cURus- approval									
³⁾ With cURus approval, - min. order quantity 1000 pcs									
⁴⁾ With cURus approval, - min. order quantity 400 pcs									

MATERIAL PROPERTIES



Fitting: Mod. polyamide PA 6
Connecting thread Mod. polyamide PA 6

THERMAL PROPERTIES



Temperature / temperature range
-40 – 110 °F Short periods 140 °F

PROTECTION CLASS



Protection class
IP 68 up to 6 bar (IP 69K)

Type VG (plastic thread)

FIRE BEHAVIOR



acc. to UL94 V0 self-extinguishing



Fire properties as per EN 45545-2 :

C.I.T. R22 / R23 HL3 = 12:43 AM

LOI R22 / R23 HL3 = 33,8 %

Ds (max.) R22 / R23 HL3 = 63

Smoke emission class

SR2 DIN 54837 / 5510-2

Flammability classification

S4 DIN 5510-2

TECHNICAL INFORMATION



Halogen-free

DIN 53474

CONFORMITY



RoHS (EC Directive 2011/65/EU)

APPROVALS AND OPERATING PERMITS



Railway EU approval

EN 45545-2 R22/R23 3x HL3



CSA approval



cURus-approval

GENERAL INFORMATION



Made in Germany

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_64774~20220201~890283~suv_vg_ku