


BZS labeling system - label rail

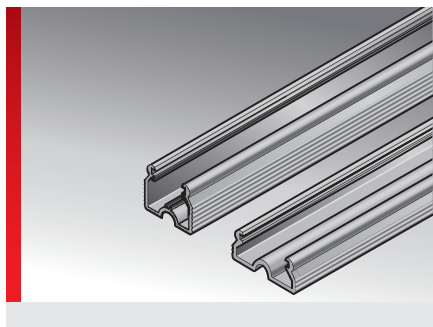

PRODUCT INFORMATION

The BZS system was developed as a simple means of accommodating a great deal of labeling information in or on the control cabinet.

The label holder with the snap-in labels provides vertical and horizontal designations on terminal blocks and other components. It may be fitted on the top-hat rail, C-rail or the cable duct with a high degree of flexibility.

The label holders can be trimmed to any length and they are available in 9 mm and 15 mm widths.

Different mounting modules are available for fixing (see „BZS labeling system - Mounting“).

The label plates in the label holders can be protected with covers (see „BZS and BZS/F label holder - cover“).

SPECIFICATIONS

	Polyvinyl chloride (PVC)
	-40 – 80 °F
	V0
	

Article	Order No.	Color	Length mm	Width mm	Recommended label Plate	MOQ pcs.
Label rail for mounting labels at 9 mm width						
BZS 09 - 500	86301222	Black	500.00	9.00	KS0 x/9	25
BZS 09 - 600	86301224	Black	600.00	9.00	KS0 x/9	25
BZS 09 - 1000	86301226	Black	1000.00	9.00	KS0 x/9	25
BZS 09 - 1300	86301228	Black	1300.00	9.00	KS0 x/9	25
Label rail for mounting labels at 15 mm width						
BZS 15 - 500	86301262	Black	500.00	15.00	KS 15/x	25
BZS 15 - 600	86301264	Black	600.00	15.00	KS 15/x	25
BZS 15 - 1000	86301266	Black	1000.00	15.00	KS 15/x	25
BZS 15 - 1300	86301268	Black	1300.00	15.00	KS 15/x	25

MATERIAL PROPERTIES

	Polyvinyl chloride (PVC)
---	--------------------------

THERMAL PROPERTIES

	Temperature / temperature range -40 – 80 °F
---	---

FIRE BEHAVIOR

	V0
---	----

BZS labeling system - label rail

ASSEMBLY METHOD



Snap-in system

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murplastik accepts no liability for damage caused as a result of using our products.

Murplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murplastik Systemtechnik GmbH • proID_60900~20220201~890286~acs_mod_bzs_sys_bzs