
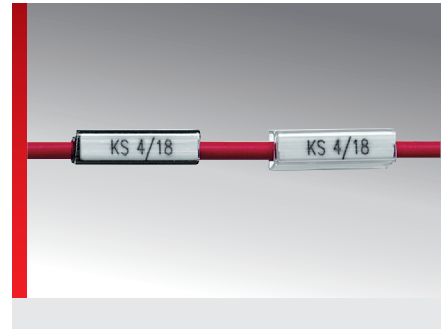
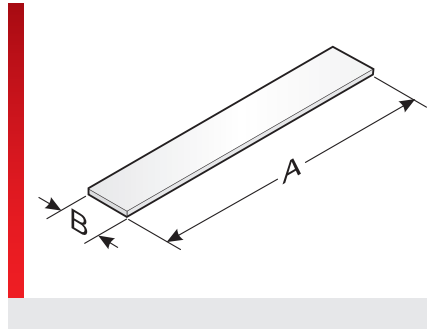


Label plate KS (single-line)

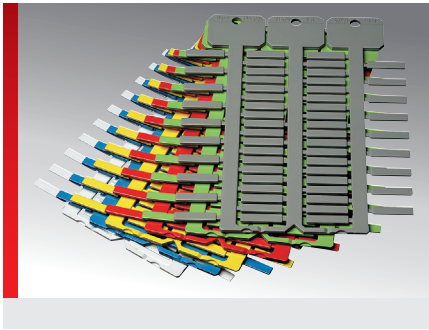

PRODUCT INFORMATION

High-quality, halogen-free, universal label. The KS 4/x label is used with sleeves KT, KTH, KTHQ or holders KM, KMH, KMHQ or KTN on wires, cables, lines or conduits.

- Available in various lengths
- Available in different colors
- Large head labeling area

Only the long mat version labels are to be used with the mp-LM laser series.

SPECIFICATIONS

	Polycarbonate (PC)
	-40 – 130 °F
	V0
	Single-line inscription

Article	Order No.	Color	RAL equiv.	label size mm (B / A)	Printable area mm	No. characters/lines	No. Per frame	Base plate	Software Article	MOQ pcs.
Label length 12 mm										
KS 4/12	86361019	Orange	2011	4.00 x 12.00	4.00 x 12.00	6 / 1	57	GP3	60	1026
Label length 12 mm, high packaging density (ST)										
KS 4/12 ST	86361072	White	9016	4.00 x 12.00	4.00 x 12.00	6 / 1	72	GP3	6ST	1296
KS 4/12 ST	86361073	Yellow	1018	4.00 x 12.00	4.00 x 12.00	6 / 1	72	GP3	7ST	1296
KS 4/12 ST	86361074	Red	2012	4.00 x 12.00	4.00 x 12.00	6 / 1	72	GP3	8ST	1296
Label length 12 mm, leveled foot (AF)										
KS 4/12-AF	86361027	White	9016	4.00 x 12.00	4.00 x 12.00	6 / 1	57	GP3	6AF	1026
Label length 18 mm										
KS 4/18	86361033	Orange	2011	4.00 x 18.00	4.00 x 18.00	10 / 1	57	GP3	10	1026
KS 4/18	86361035	Brown	8003	4.00 x 18.00	4.00 x 18.00	10 / 1	57	GP3	1B	1026
KS 4/18	86361029	Purple	4005	4.00 x 18.00	4.00 x 18.00	10 / 1	57	GP3	1L	1026
KS 4/18	86361031	Pink	4010	4.00 x 18.00	4.00 x 18.00	10 / 1	57	GP3	1R	1026
Label length 18 mm, high packaging density (ST)										
KS 4/18 ST	86361080	White	9016	4.00 x 18.00	4.00 x 18.00	10 / 1	72	GP3	1ST	1296
KS 4/18 ST	86361081	Yellow	1018	4.00 x 18.00	4.00 x 18.00	10 / 1	72	GP3	2ST	1296
KS 4/18 ST	86361082	Red	2012	4.00 x 18.00	4.00 x 18.00	10 / 1	72	GP3	3ST	1296

Label plate KS (single-line)

Article	Order No.	Color	RAL equiv.	label size mm (B / A)	Printable area mm	No. characters/lines	No. Per frame	Base plate	Software Article	MOQ pcs.
Label length 18 mm, leveled foot (AF)										
KS 4/18-AF	86361037	White	9016	4.00 x 18.00	4.00 x 18.00	10 / 1	57	GP3	5AF	1026
Label length 30 mm										
KS 4/30 PE	86361043	Green / Yellow		4.00 x 30.00	4.00 x 30.00	16 / 1	34	GP3	15P	1020

MATERIAL PROPERTIES



Polycarbonate (PC)

THERMAL PROPERTIES



Temperature / temperature range

-40 – 130 °F

FIRE BEHAVIOR



V0

TECHNICAL INFORMATION



Halogen-free

DIN/VDE 0472, Part 815

GENERAL TECHNICAL DATA



Single-line inscription

ASSEMBLY METHOD



Sleeve system



Cable tie system with sleeves



Clamping system



Self-clamping system

LABELING TECHNOLOGY



Plotters



Laser



Inkjet

Label plate KS (single-line)

Single wire, cable, and conduit labeling

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_115166~20220201~890286~acs_mod_ks_ein