


|                        |                                                                                                                                                                                                                                                                                                                                              |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>210319</b>                                                                                                                                                                                                                                                                                                                                |
| article description    | <b>Aufbaugerätestecker mit Motorschutz 16A<br/>CM.7100/16/U400-V 10,0-16,0A</b>                                                                                                                                                                                                                                                              |
| description long       | Surface plug CEE 16A 5p 400V with motor protection<br>Housing: ISO housing with drillmarks for 68x68 and 80x80mm<br>400V 50Hz, under voltage tripping with padlock barrier device<br>setting range: 10,0A - 16,0A<br>protection rating: IP44<br>Particularly suitable for direct mounting on the motor terminal surface (without N terminal) |
| GTIN (EAN)             | 9003399970214                                                                                                                                                                                                                                                                                                                                |
| country of origin      | DE                                                                                                                                                                                                                                                                                                                                           |
| customs number         | 85362010                                                                                                                                                                                                                                                                                                                                     |
| net weight             | 0.900 kg                                                                                                                                                                                                                                                                                                                                     |
| minimum order quantity | 1                                                                                                                                                                                                                                                                                                                                            |

|                                               |                            |
|-----------------------------------------------|----------------------------|
| ETIM 9.0                                      | EC000074                   |
| Overload release current setting              | 10.0 – 16.0 A              |
| With thermal overload protection              | True                       |
| Switch off technique                          | Thermomagnetic             |
| Rated operating voltage                       | 400 – 400 V                |
| Rated permanent current I <sub>u</sub>        | 16 A                       |
| Type of electrical connection of main circuit | Screw connection           |
| Type of control element                       | Push button                |
| Device construction                           | Complete device in housing |
| With integrated auxiliary switch              | True                       |
| With integrated under voltage release         | True                       |
| Number of poles                               | 5                          |
| Degree of protection (IP)                     | IP44                       |

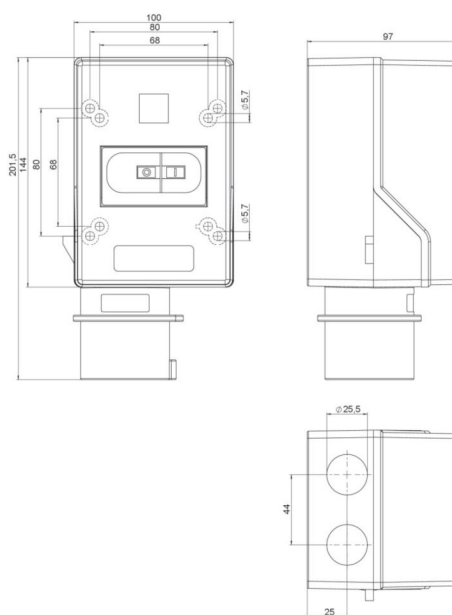

<https://www.pcelectric.at/shop/en/?func=detail&artnr=210319>