


Type USH

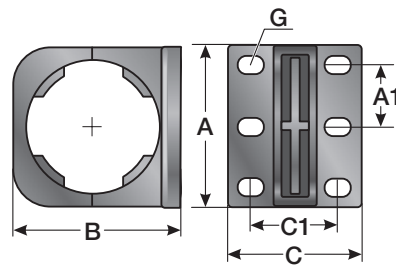

PRODUCT INFORMATION

The USH holder consists of an upper and a lower part made of specially modified polycarbonate. The material is halogen, phosphor and cadmium-free. The holder is used as a quick and easy connection between control cabinet and door.

The USH holder features the following

advantages:

- Various fastening possibilities
- Protective conduits can still be rotated in the holder
- Pre-assembly of lower part possible
- Suitable for all Murrflex corrugated conduit profiles.

SPECIFICATIONS



Polycarbonate



-30 – 100 °F



acc. to UL94 V2 self-extinguishing



RoHS



Article	Order No.	Color	Suitable for Murrflex	G suitable for	A mm	B mm	C mm	A1 mm	C1 mm	MOQ pcs.
USH 11	83641019	Black	M16/P11	M5	38.00	39.50	38.00	12.90	22.80	50
USH 16	83641020	Black	M20/P16(S)	M5	38.00	39.40	38.00	12.90	22.80	50
USH 21	83641022	Black	M25/P21(S)	M5	38.00	39.25	38.00	12.90	22.80	50
USH 29	83641024	Black	M32/P29(S)	M5	46.35	47.65	38.20	17.60	25.75	50
USH 36	83641026	Black	M40/P36(S)	M5	52.45	59.10	60.40	20.00	48.00	50
USH 48	83641028	Black	M50/P48(S)	M5	76.20	77.20	59.70	27.70	47.10	50
USH 11	83641009	Gray	M16/P11	M5	38.00	39.50	38.00	12.90	22.80	50
USH 16	83641010	Gray	M20/P16(S)	M5	38.00	39.40	38.00	12.90	22.80	50
USH 21	83641012	Gray	M25/P21(S)	M5	38.00	39.25	38.00	12.90	22.80	50
USH 29	83641014	Gray	M32/P29(S)	M5	46.35	47.65	38.20	17.60	25.75	50
USH 36	83641016	Gray	M40/P36(S)	M5	52.45	59.10	60.40	20.00	48.00	50
USH 48	83641018	Gray	M50/P48(S)	M5	76.20	77.20	59.70	27.70	47.10	50

MATERIAL PROPERTIES



Polycarbonate

THERMAL PROPERTIES



Temperature / temperature range
-30 – 100 °F

FIRE BEHAVIOR



acc. to UL94 V2 self-extinguishing

Type USH

TECHNICAL INFORMATION

HF Halogen-free

CONFORMITY

RoHS RoHS (EC Directive 2011/65/EU)

GENERAL INFORMATION

Made in Germany Made in Germany

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_65834~20220201~890283~suv_ush