
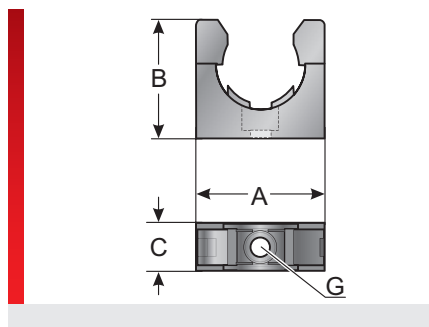


Type UH

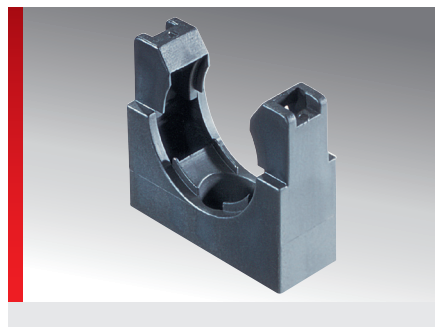

PRODUCT INFORMATION

The UH holder is made of specially modified polyamide. The material is halogen, phosphor and cadmium-free. The holder is used to fix cable protection conduits to equipment and machinery.

The UH holder features the following advantages:

- Quick assembly thanks to single-hole fixing
- Protective conduit is simply snapped in

- Optimum connection of conduit to holder thanks to double webs of holder
- Optional BL bracket for applications with high stresses

Specification:

- EN 45545-2 3x HL3
- NFPA 130: ASTM E 162, ASTM E 662
- ECE 324 R 118 Annex 6+8

SPECIFICATIONS

	UL listed material Mod. polyamide PA 6
	-40 – 110 °F Short periods 140 °F
	acc. to UL94 V0 self-extinguishing
	C.I.T. R22 / R23 HL3 = 00:43 LOI R22 / R23 HL3 = 33,8 % Ds (max.) R22 / R23 HL3 = 63



Article	Order No.	Color	Suitable for Murrflex	G suitable for	A mm	B mm	C mm	MOQ pcs.
UH 07	83621210	Black	M10/P07	M4	29.00	23.00	11.00	100
UH 09/M4	83621212	Black	M12/P09	M4	30.00	23.00	12.50	100
UH 09/M5	83621213	Black	M12/P09	M5	30.00	23.00	12.50	100
UH 11/M4	83621214	Black	M16/P11	M4	30.00	23.00	12.50	100
UH 11/M5	83621215	Black	M16/P11	M5	30.00	23.00	12.50	100
UH 16/M5	83621216	Black	M20/P16(S)	M5	35.00	30.00	15.00	100
UH 16/M6	83621217	Black	M20/P16(S)	M6	35.00	30.00	15.00	100
UH 21	83621218	Black	M25/P21(S)	M6	42.00	38.00	16.00	100
UH 29	83621220	Black	M32/P29(S)	M6	51.00	43.00	16.00	50
UH 36	83621222	Black	M40/P36(S)	M6	61.00	51.00	18.00	50
UH 48	83621224	Black	M50/P48(S)	M6	74.00	64.00	19.00	50
UH 07	83621110	Gray	M10/P07	M4	29.00	23.00	11.00	100
UH 09/M4	83621112	Gray	M12/P09	M4	30.00	23.00	12.50	100
UH 09/M5	83621113	Gray	M12/P09	M5	30.00	23.00	12.50	100
UH 11/M4	83621114	Gray	M16/P11	M4	30.00	23.00	12.50	100
UH 11/M5	83621115	Gray	M16/P11	M5	30.00	23.00	12.50	100
UH 16/M5	83621116	Gray	M20/P16(S)	M5	35.00	30.00	15.00	100
UH 16/M6	83621117	Gray	M20/P16(S)	M6	35.00	30.00	15.00	100
UH 21	83621118	Gray	M25/P21(S)	M6	42.00	38.00	16.00	100
UH 29	83621120	Gray	M32/P29(S)	M6	51.00	43.00	16.00	50
UH 36	83621122	Gray	M40/P36(S)	M6	61.00	51.00	18.00	50
UH 48	83621124	Gray	M50/P48(S)	M6	74.00	64.00	19.00	50

Type UH

MATERIAL PROPERTIES



UL listed material Mod. polyamide PA 6

THERMAL PROPERTIES



Temperature / temperature range
 -40 – 110 °F Short periods 140 °F

FIRE BEHAVIOR



acc. to UL94 V0 self-extinguishing



Fire properties as per EN 45545-2 :
 C.I.T. R22 / R23 HL3 = 00:43
 LOI R22 / R23 HL3 = 33,8 %
 Ds (max.) R22 / R23 HL3 = 63

TECHNICAL INFORMATION



HF Halogen-free

CONFORMITY



RoHS RoHS (EC Directive 2011/65/EU)

APPROVALS AND OPERATING PERMITS



Railway EU approval
 EN 45545-2 R22/R23 3x HL3



cURus-approval

GENERAL INFORMATION



Made in Germany

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_65782~20220201~890283~suv_uh