


Type CKSV (conduit and cable fitting)

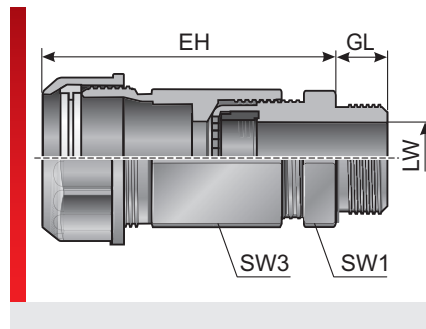

PRODUCT INFORMATION

SPECIFICATIONS

-  Fitting: Mod. polyamide PA 6
Molded seal: Perbunan (NBR)
-  -40 – 110 °F Short periods 140 °F
-  IP 65
-  acc. to UL94 V0 self-extinguishing
-  C.I.T. R22 / R23 HL3 = 12:43 AM
LOI R22 / R23 HL3 = 33,8 %
Ds (max.) R22 / R23 HL3 = 63



Article	Order No.	Color	Connecting thread	Suitable for Murrflex	EH mm	GL mm	Clamping range (LW) mm	SW 1 / 3 mm	MOQ pcs.
CSKV-M16x1.5/9	83581850	Black	M16x1,5	M12/P09	45.00	8.00	4.00 – 8.00	19.00 / 19.00	50
CSKV-M16x1.5/11	83581852	Black	M16x1,5	M16/P11	49.00	8.00	5.00 – 10.00	22.00 / 22.00	50
CSKV-M20x1.5/13.5-16	83581854	Black	M20x1,5	NW13	50.00	9.00	6.00 – 12.00	24.00 / 27.00	50
CSKV M20x1.5/16/6-12	83980354	Black	M20x1,5	M20/P16(S)	50.00	9.00	6.00 – 12.00	24.00 / 27.00	50
No stock goods, delivery time and minimum order quantities upon request									
CSKV-M20x1.5/16	83581856	Black	M20x1,5	M20/P16(S)	50.00	9.00	10.00 – 14.00	27.00 / 27.00	50
CSKV-M25x1.5/21	83581858	Black	M25x1,5	M25/P21(S)	60.00	11.00	13.00 – 18.00	33.00 / 33.00	50
CSKV-M32x1.5/29	83581860	Black	M32x1,5	M32/P29(S)	69.00	11.00	18.00 – 25.00	42.00 / 42.00	25
CSKV-M40x1.5/36	83581862	Black	M40x1,5	M40/P36(S)	88.00	13.00	22.00 – 32.00	53.00 / 53.00	10
CSKV-M63x1.5/48	83581864	Black	M63x1,5	M50/P48(S)	109.00	14.00	37.00 – 44.00	65.00 / 65.00	10
CSKV-M16x1.5/9	83581810	Gray	M16x1,5	M12/P09	45.00	8.00	4.00 – 8.00	19.00 / 19.00	50
CSKV-M16x1.5/11	83581812	Gray	M16x1,5	M16/P11	49.00	8.00	5.00 – 10.00	22.00 / 22.00	50
CSKV-M20x1.5/13.5-16	83581814	Gray	M20x1,5	NW13	50.00	9.00	6.00 – 12.00	24.00 / 27.00	50
CSKV-M20x1.5/16	83581816	Gray	M20x1,5	M20/P16(S)	52.00	9.00	10.00 – 14.00	27.00 / 27.00	50
CSKV-M25x1.5/21	83581818	Gray	M25x1,5	M25/P21(S)	60.00	11.00	13.00 – 18.00	33.00 / 33.00	50
CSKV-M32x1.5/29	83581820	Gray	M32x1,5	M32/P29(S)	69.00	11.00	18.00 – 25.00	42.00 / 42.00	25
CSKV-M40x1.5/36	83581822	Gray	M40x1,5	M40/P36(S)	88.00	13.00	22.00 – 32.00	53.00 / 53.00	10
CSKV-M63x1.5/48	83581824	Gray	M63x1,5	M50/P48(S)	109.00	14.00	37.00 – 44.00	65.00 / 65.00	10
CSKV-Pg 09	83581250	Black	Pg 09	M12/P09	45.00	8.00	4.00 – 8.00	19.00 / 19.00	50
CSKV-Pg 11	83581252	Black	Pg 11	M16/P11	49.00	8.00	5.00 – 10.00	22.00 / 22.00	50
CSKV-Pg 13.5/16	83581254	Black	Pg 13.5	M20/P16(S)	52.00	9.00	6.00 – 12.00	24.00 / 27.00	50

Type CKSV (conduit and cable fitting)

Article	Order No.	Color	Connecting thread	Suitable for Murrflex	EH mm	GL mm	Clamping range (LW) mm	SW 1 / 3 mm	MOQ pcs.
CSKV-Pg 16	83581256	Black	Pg 16	M20/P16(S)	52.00	10.00	10.00 – 14.00	27.00 / 27.00	50
CSKV-Pg 21	83581258	Black	Pg 21	M25/P21(S)	60.00	11.00	13.00 – 18.00	33.00 / 33.00	50
CSKV-Pg 29	83581260	Black	Pg 29	M32/P29(S)	69.00	11.00	18.00 – 25.00	42.00 / 42.00	25
CSKV-Pg 36	83581262	Black	Pg 36	M40/P36(S)	88.00	13.00	22.00 – 32.00	53.00 / 53.00	10
CSKV-Pg 48	83581264	Black	Pg 48	M50/P48(S)	95.00	14.00	37.00 – 44.00	65.00 / 65.00	10
CSKV-Pg 09	83581210	Gray	Pg 09	M12/P09	45.00	8.00	4.00 – 8.00	19.00 / 19.00	50
CSKV-Pg 11	83581212	Gray	Pg 11	M16/P11	49.00	8.00	5.00 – 10.00	22.00 / 22.00	50
CSKV-Pg 13.5/16	83581214	Gray	Pg 13.5	M20/P16(S)	52.00	9.00	6.00 – 12.00	24.00 / 27.00	50
CSKV-Pg 16	83581216	Gray	Pg 16	M20/P16(S)	52.00	10.00	10.00 – 14.00	27.00 / 27.00	50
CSKV-Pg 21	83581218	Gray	Pg 21	M25/P21(S)	60.00	11.00	13.00 – 18.00	33.00 / 33.00	50
CSKV-Pg 29	83581220	Gray	Pg 29	M32/P29(S)	69.00	11.00	18.00 – 25.00	42.00 / 42.00	25
CSKV-Pg 36	83581222	Gray	Pg 36	M40/P36(S)	88.00	13.00	22.00 – 32.00	53.00 / 53.00	10
CSKV-Pg 48	83581224	Gray	Pg 48	M50/P48(S)	95.00	14.00	37.00 – 44.00	65.00 / 65.00	10
No stock goods, delivery time and minimum order quantities upon request									
CSKV 3/8"-09	83583250	Black	3/8"	M12/P09	45.00	14.00	4.00 – 8.00	19.00 / 22.00	50
CSKV 1/2"-16	83583256	Black	1/2"	M20/P16(S)	52.00	13.00	10.00 – 14.00	27.00 / 27.00	50
CSKV 3/4"-21	83583258	Black	3/4"	M25/P21(S)	60.00	14.00	13.00 – 18.00	33.00 / 33.00	25
CSKV 1"-29	83583260	Black	1"	M32/P29(S)	69.00	19.00	18.00 – 25.00	42.00 / 42.00	25
CSKV 3/8"-09	83583210	Gray	3/8"	M12/P09	45.00	14.00	4.00 – 8.00	19.00 / 22.00	50
No stock goods, delivery time and minimum order quantities upon request									
CSKV 1/2"-16	83583216	Gray	1/2"	M20/P16(S)	52.00	13.00	10.00 – 14.00	27.00 / 27.00	50
CSKV 3/4"-21	83583218	Gray	3/4"	M25/P21(S)	60.00	14.00	13.00 – 18.00	33.00 / 33.00	25
No stock goods, delivery time and minimum order quantities upon request									
CSKV 1"-29	83583220	Gray	1"	M32/P29(S)	69.00	19.00	18.00 – 25.00	42.00 / 42.00	25
No stock goods, delivery time and minimum order quantities upon request									

MATERIAL PROPERTIES



Fitting: Mod. polyamide PA 6
Molded seal: Perbunan (NBR)

THERMAL PROPERTIES



Temperature / temperature range
-40 – 110 °F Short periods 140 °F

PROTECTION CLASS



Protection class
IP 65

Type CKSV (conduit and cable fitting)

FIRE BEHAVIOR



acc. to UL94 V0 self-extinguishing



Fire properties as per EN 45545-2 :

C.I.T. R22 / R23 HL3 = 12:43 AM

LOI R22 / R23 HL3 = 33,8 %

Ds (max.) R22 / R23 HL3 = 63

TECHNICAL INFORMATION



Halogen-free

CONFORMITY



RoHS (EC Directive 2011/65/EU)

APPROVALS AND OPERATING PERMITS



Railway EU approval

EN 45545-2 R22/R23 3x HL3



cURus-approval

GENERAL INFORMATION



Made in Germany

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_65184~20220201~890283~suv_cskv