
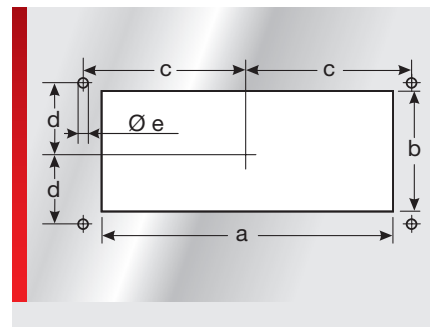


KDP/N 24 cable entry plate, plastic

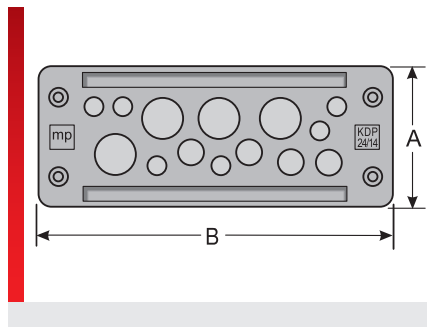

PRODUCT INFORMATION

- Snap-in plastic cable entry plate with two elastomer plates
- Economical connection technology for tool-free wiring of equipment and machinery
- The alternative to cable fittings
- Very good strain relief
- Protection class: IP 65
- Thermal stability: -30 °C to +70 °C
- Material: Frame: Polyamide 6.6 / Seal: TPU/NBR/EPDM
- RoHS compliant
- UV resistant
- Made in Germany
- Suitable for standard cut-outs for 24-pin industrial connectors
- Assembly possible with catch hooks (sheet thickness 1.5 mm - 2.0 mm) or with M5 screws

SPECIFICATIONS

	Enclosure: Polyamide 6.6
	Seal: TPU / NBR / EPDM
	IP65

Article	Order No.	Color	No. Openings	MOQ pcs.
KDP/N 24/10	87301108	Black	10	1
KDP/N 24/11	87301110	Black	11	1
KDP/N 24/12	87301120	Black	12	1
KDP/N 24/13	87301130	Black	13	1
KDP/N 24/14	87301140	Black	14	1
KDP/N 24/17	87301150	Black	17	1
KDP/N 24/17-1	87301151	Black	17	1
KDP/N 24/22	87301160	Black	22	1
KDP/N 24/22	87301161	Black	22	100
KDP/N 24/23	87301170	Black	23	1
KDP/N 24/29	87301180	Black	29	1
KDP/N 24/29	87301182	Black	29	100
KDP/N 24/80	87301190	Black	80	1

DIMENSION TABLE

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/N 24/10	87301108	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/11	87301110	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/12	87301120	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/13	87301130	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/14	87301140	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50

KDP/N 24 cable entry plate, plastic

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/N 24/17	87301150	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/17-1	87301151	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/22	87301160	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/22	87301161	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/23	87301170	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/29	87301180	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/29	87301182	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50
KDP/N 24/80	87301190	15.00	59.00	147.00	112.00	36.00	65.00	16.00	5.50

MATERIAL PROPERTIES



Enclosure: Polyamide 6.6
Seal: TPU / NBR / EPDM

PROTECTION CLASS



Protection class
IP65

TECHNICAL INFORMATION



free of LABS



According to ISO 4892-2

CONFORMITY



RoHS (EC Directive 2011/65/EU)

APPROVALS AND OPERATING PERMITS



UL approval



UL Type 12

GENERAL INFORMATION



Made in Germany

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_134275~20220216~890287~kdh_kdp_n_24